



- Standard Analogue phone/SIP phone
- Vandal resistant handset and cord
- Weather proof protection to IP67
- Full keypad with memory, 0-9 buttons can be programmed as speed dial button.
- The phone will ringing loudly and lamp will flashing when there is a incoming call.
- With auto-answer feature after 5ringing,Auto-release the line when the other side cut off the line.
- Built-in amplifier,with external ringer and lamp:15W (30W optional),broadcasting feature
- Wall mounting, simple installation
- External power supply
- CE, FCC, RoHS, ISO9001 compliant

The JR100 series telephones are fully contained within a corrosion resistant cast aluminium weatherproof case with a door providing complete protection against dust and moisture ingress, resulting in a highly reliable product with a long MTBF.

The unique robust handset is manufactured from moulded Bulk Molding Compound and designed specifically to withstand arduous use in all environments, armoured cord to provide additional resistance to vandalism or heavy industrial use.

The JR100 series Weatherproof Telephones are designed for use by the railways, power stations, the armed services and heavy industry which require very reliable telephony under adverse conditions.

#### Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

#### SIP-VoIP TECHNICAL SPECIFICATIONS

##### Adapter Input:

100-240VAC 50~60Hz Output:5V/1A

##### Port:

WAN:10/100Base- T RJ-45 for LAN, Auto MDIX

LAN:10/100Base- T RJ-45 for PC, Auto MDIX

##### Power Consumption:

Idle:1.5W/ Active:1.8W

##### Voice Features

- Support 2 lines SIP, SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722,G.726
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex.
- SIP support SIP domain,SIP authentication(none, basic,MD5),DNS name of server, peer to peer
- SIP support 2 servers, user can through each server to calling in and out

##### Network Features

- WAN/LAN: support Bridge mode
- Support PPPoE for xDSL
- support VLAN
- Support Stun penetration
- Support DHCP get IP on WAN port

## TECHNICAL SPECIFICATIONS

### Casing Material

Die cast aluminium, epoxy powder coated.

### Colors

Yellow, Orange, other colors to special order

### Handset Material

Cyclopol with stainless steel spiral cord

### Keypad

Rubber Keypad

### Temperature

Operating: -40°C to +70°C

Storing: -45°C to +80°C

### Weather Resistance

IP67

### Ringtone

Shrill warble tone 80 dBA @ 1 metre typical

### Hook switch

Electronic / magnetic with no visible moving parts

### M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

### Weight

Up to 6 kg depending on option

## ANALOGUE

### Dialing

MF (tone)

### Power supply

AC/DC Power Supply

### Lightning / Transients

Protection to ITU-T k.21 enhanced levels

### Programming

Can be programmed remotely by DTMF tone or use keypad

## PACKAGE

Unit size: 204 \* 334 \* 126 (mm)





Carton size: 200 \* 300 \* 440 (mm)

Packaging materials: pearl cotton, carton

Gross weight: 7KG

Net weight: 6KG

## DIMENSIONS:

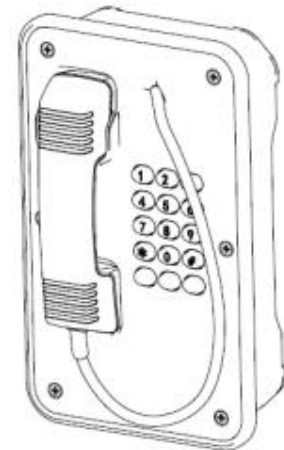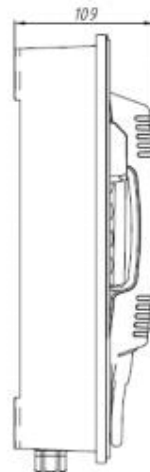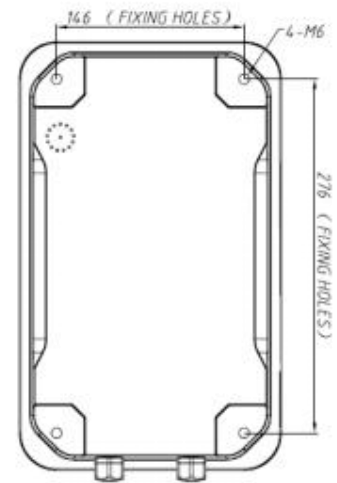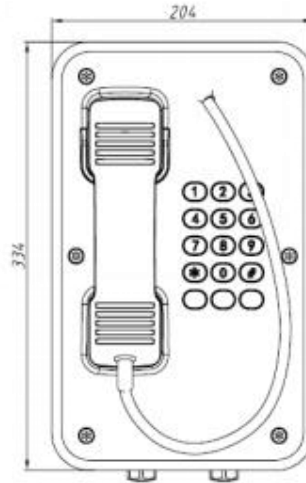

(Measured in mm)

## APPROVALS



This mark indicates compliance with the:  
Radio & Telecommunications Terminal Equipment  
Directive  
2004/108/EC



This mark indicates compliance with the:  
FCC Part 15 Subpart B Class B